

KONE SIGNALIZATION



KSS 570

KSS 570 signalization offers a high degree of flexibility to meet the needs of your building. Choose from a wide range of aesthetic options to match the look and feel of your elevator and complement your lobby design.

Finish options:

- Brushed Stainless Steel (4SS; Grade 441)
- Brushed Stainless Steel (4SS; Grade 304) **P**
- Golden Brushed Stainless Steel (SS1) **P**


Max landings: Flush & applied: 24; Swing: 36
(applications exceeding max utilize keypad)

Displays: Flush and swing: amber, white or blue dot matrix as standard; Media screen available as option

Buttons: Round with amber, white or blue acceptance light


Note: Variable dimensions are available for modernization applications

Flush Car Operating Panel*

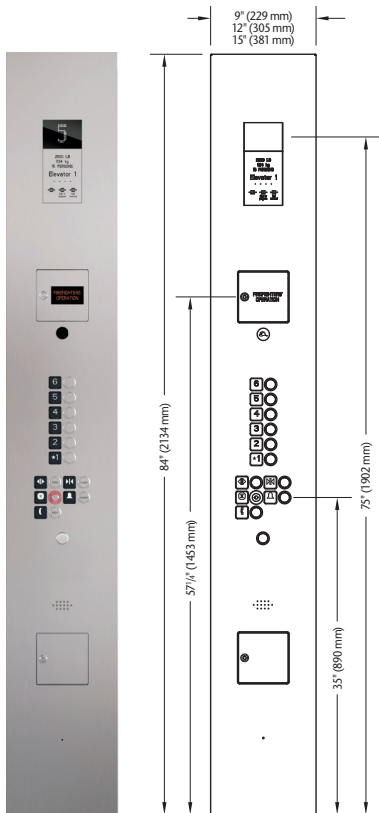


Note: If IBC 2018 or ASME A17.1-2019/CSA B44-19 code is applicable, contact your local sales professional for controller space configurations.

Flush Keypad Car Operating Panel*

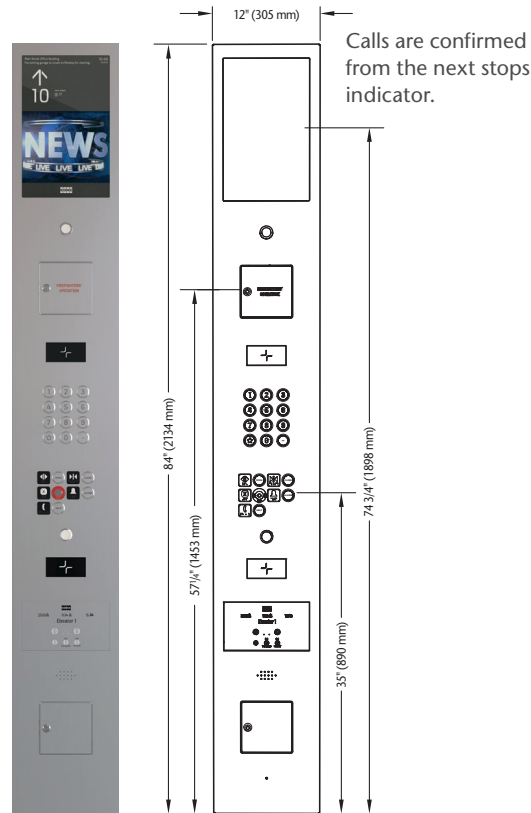

Flush keypad car operating panel: Up to 4 direct call buttons available for non-numeric floors

Flush Emergency Communications Car Operating Panel*

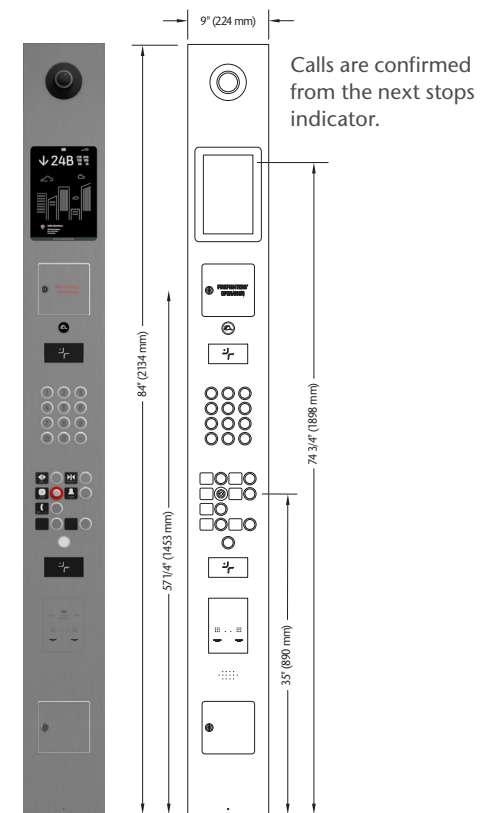


KONE Emergency Communications Car Operating Panel is also available for conventional and destination control systems. Contact your local sales representative for more information.


*Modernization applications utilize an applied car operating panel **P** Premium finish

KSS 570


Swing Car Operating Panel

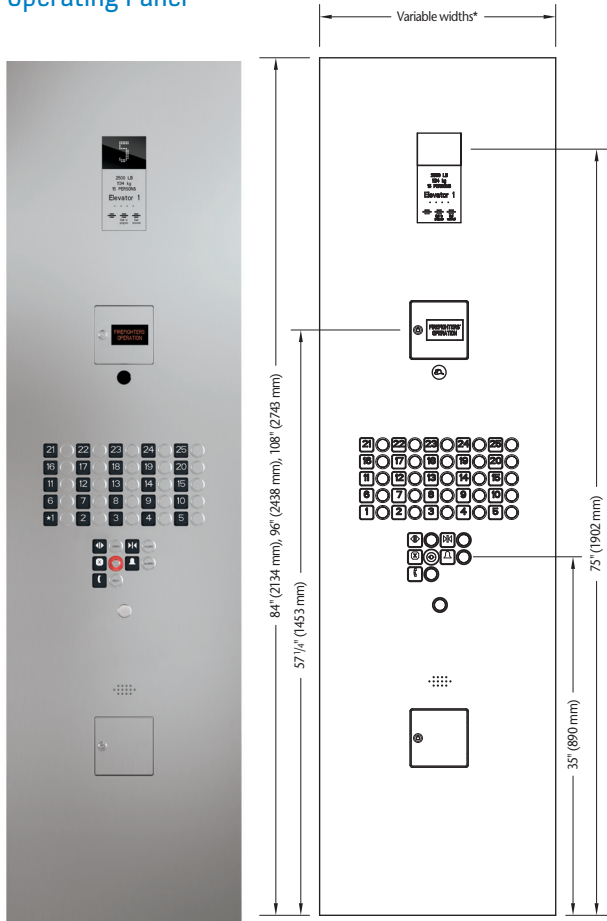

Swing Keypad Car Operating Panel

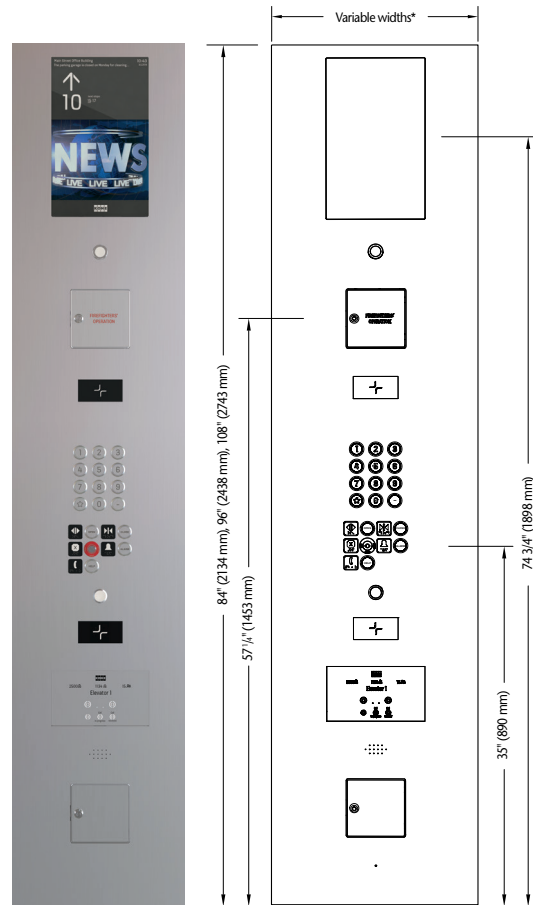

Swing Emergency Communications Car Operating Panel

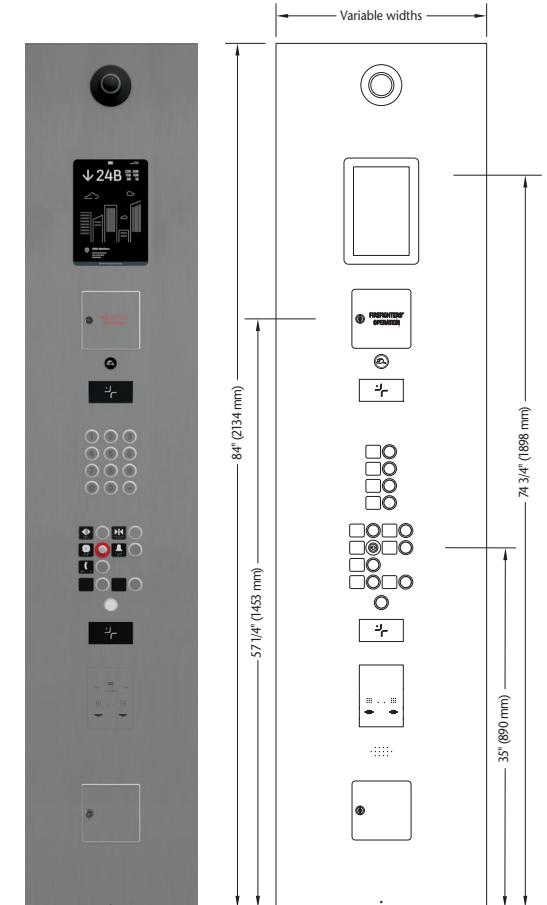

*Width is determined by push button quantity and arrangement

P Premium finish

Swing keypad car operating panel:
Up to 6 direct call buttons available for non-numeric floors

KONE Emergency Communications Car Operating Panel is also available for conventional and destination control systems. Contact your local sales representative for more information.

KSS 570

Finish options:


- Brushed Stainless Steel (4SS; Grade 441)
- Brushed Stainless Steel (4SS; Grade 304) **P**
- Golden Brushed Stainless Steel (SS1) **P**

Displays: Amber, white or blue dot matrix


Buttons: Round with amber, white or blue call acceptance light

Note: Hall fixture faceplates are 19mm thick and are not flush with the wall surface. Fixtures with a key switch require a back box.

Hall Lanterns*



Horizontal Orientation

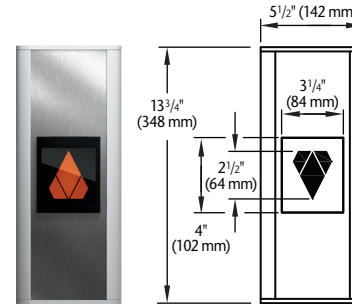


Vertical Orientation

Car Direction Lanterns




Amber White

Hall Position Indicators*





Horizontal Orientation



Vertical Orientation

Hall Stations

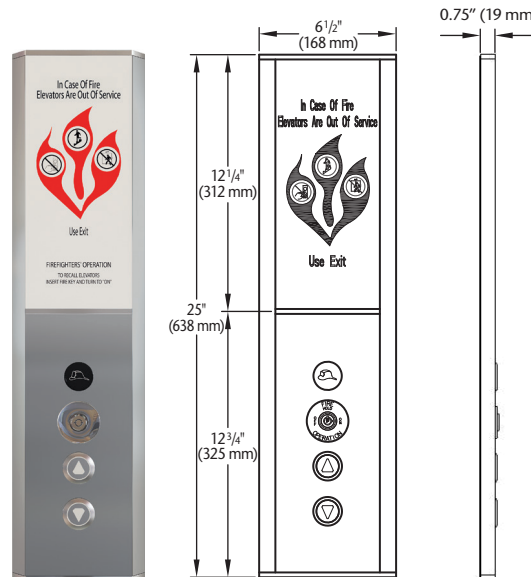

*For modernization applications, an extended backplate option is available.

KSS 140



KSS 140 is designed to withstand the most demanding environments by being impact, burn and splash resistant. Scratch resistance is achieved by utilizing the textured Scottish Quad finish option.

Finish options:

- Brushed Stainless Steel (4SS; Grade 441)
- Brushed Stainless Steel (4SS; Grade 304) **P**
- Scottish Quad (K) **P**

Display: Amber dot matrix

Buttons: Vandal; metallic, impact-resistant, round amber call acceptance light

Mounting: Flush*

Max landings: New elevators: 24;
existing elevators: 18


Note: Variable dimensions are available for modernization applications

Note: If IBC 2018 or ASME A17.1-2019/CSA B44-19 code is applicable, contact your local sales professional for controller space configurations.


*Modernization applications utilize an applied car operating panel

P Premium finish


Flush Car Operating Panel*

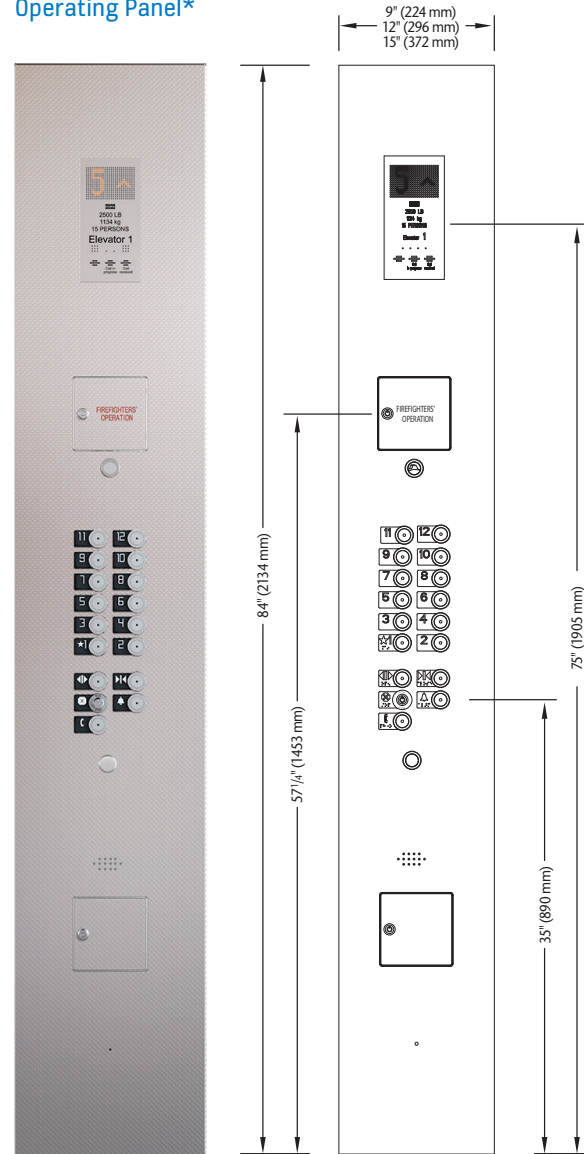


Hall Stations



Hall Lanterns



Hall Position Indicators

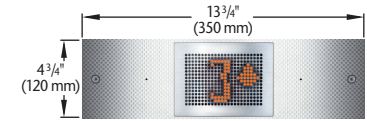

KONE

kone.us

This publication is for general informational purposes only. KONE Inc. reserves the right to alter the product design and specifications without prior notice. Minor differences between printed and actual colors may exist. KONE is a registered trademark of KONE Corporation. Copyright © 2021 KONE Inc.

SF2968
Rev 0421