

# KONE MONOSPACE® 300 DX

## CONFIGURATIONS & DIMENSIONS

Max Travel<sup>(8)</sup>: 48 ft.

Speed: 150 fpm

Car Height (F):

Max Landings: 4

(.75 m/s)

7 ft. 6 in. or 9 ft (2286 or 2743mm)

Entrance Height (G):

7 or 8ft. (2134 or 2438mm)

		(A)	(A) <sub>SEISMIC</sub>	(B)	(B) <sub>SEISMIC</sub>	(C)	(D)	(E)				
FRONT OPENING	PASSENGER	CAPACITY LBS. (kg)	OPENING TYPE <sup>(11)</sup>	HOISTWAY WIDTH (mm)	HOISTWAY DEPTH (mm)	HOISTWAY DEPTH (mm)	INTERIOR WIDTH (mm)	INTERIOR DEPTH (mm)	DOOR WIDTH (mm)	STRETCHER ACCOMMODATION <sup>(10)</sup>		
		2000 (907)	Side Opening	7'-4" (2235)	7'-9" (2362)	5'-9" (1753)	5'-9 1/2" (1766)	5'-8 7/8" (1750)	4'-4 7/16" (1332)	3'-0" (914)	NO	
FRONT & REVERSE OPENING		2500 (1134)	Side Opening or Center Opening	8'-4" (2540)	8'-9" (2667)	5'-9" (1753)	5'-9 1/2" (1766)	6'-8 7/8" (2055)	4'-4 7/16" (1332)	3'-6" (1067)	NO	
		3000 (1361)	Side Opening or Center Opening	8'-4" (2540)	8'-7" (2616)	6'-3" (1905)	6'-3 1/2" (1918)	6'-5 5/8" (1971)	5'-0 7/16" (1536)	3'-6" (1067)	NO	
		3500 (1588)	Side Opening or Center Opening	8'-4" (2540)	8'-7" (2616)	6'-11" (2108)	6'-11" (2108)	6'-5 5/8" (1971)	5'-6 5/8" (1693)	3'-6" (1067)	YES <sup>(10)</sup>	
		2000 (907)	Side Opening	7'-4" (2235)	7'-9" (2362)	6'-3 3/4" (1924)	6'-3 3/4" (1924)	5'-8 7/8" (1750)	4'-4 7/16" (1332)	3'-0" (914)	NO	
		2500 (1134)	Side Opening or Center Opening	8'-4" (2540)	8'-9" (2667)	6'-3 3/4" (1924)	6'-3 3/4" (1924)	6'-8 7/8" (2055)	4'-4 7/16" (1332)	3'-6" (1067)	NO	
		3000 (1361)	Side Opening or Center Opening	8'-4" (2540)	8'-7" (2616)	6'-11 3/4" (2127)	6'-11 3/4" (2127)	6'-5 5/8" (1971)	5'-0 7/16" (1536)	3'-6" (1067)	NO	
		3500 (1588)	Side Opening or Center Opening	8'-4" (2540)	8'-7" (2616)	7'-6" (2286)	7'-6" (2284)	6'-5 5/8" (1971)	5'-6 5/8" (1693)	3'-6" (1067)	NO	


Visit [kone.us](http://kone.us) for the latest project-specific details, BIM, CAD drawings, CSI specifications, electrical data, reaction loads and building access requirements.

CLEAR OVERHEAD (H) AND PIT DEPTH (I)		CONTROL SPACE (J)			(K)	(L)	
CAPACITY LBS. (kg)	150 FPM (.75 m/s)		CAPACITY LBS. (kg)	CONTROLLER SPACE	WIDTH (mm)	DEPTH (mm)	DOOR WIDTH (mm)
	Pit Depth (mm)	Clear Overhead (mm)					
2000 to 3500 (907 to 1588)	5'-0" (1524)	11'-8" (3556) <sup>(11)</sup>	2000 to 3500 (907 to 1588)	Remote Closet	4'-1" (1245)	1'-11" (584)	3'-6" (1067)
			2000 to 3500 (907 to 1588)	Adjacent or Remote Room	5'-0" (1524)	Dimension (B)	3'-0" (914)


### Notes

- An 8" inch tall hoist beam is required for installation (by others). Dimension (H) reflects 11'-8" clearance under hoist beam. This clearance is available with a moveable hoist beam.
- If an EBD (Emergency Battery Device) is required please contact your KONE Sales Professional for further detail regarding dimensions, (J) and (L).
- For wood hoistways the published hoistway (A) dimension can not be reduced.
- The published hoistway (A) dimensions represent the minimum clear inside requirements. Construction efficiencies can be realized by increasing these dimensions by up to 2" (51 mm).
- For pit depths less than 5' (1524 mm) please contact a KONE Sales Professional.
- The published interior width (C) and depth (D) dimensions represent the minimum clear inside requirements without raised panels. For interior width (C) and Depth (D) dimensions with raised panels please contact a KONE sales Professional.
- A pit ladder wall pocket may be required. Please contact a KONE sales Professional.
- Contact your local KONE Sales Professional regarding local code variations when utilizing the integrated remote closet options.
- If IBC (International Building Code) 2018 or ASME A17.1-2019/ CSA B44-19 code is applicable, contact your local sales professional for controller space configurations.
- Stretcher accessibility based only for side opening type and International / California Building Code specified 24 inch by 84 inch stretcher with 5 inch degree radius corners. Customers in Canada, please review stretcher compliance with your local sales representatives.
- All KONE MonoSpace 300 DX elevators utilize a single speed door.
- All dimensions are based on an 7'-6" (2286 mm) cab with a 7'-0" (2134 mm) door. Alternate car and door heights are available but will affect dimension (H).

## Plan views

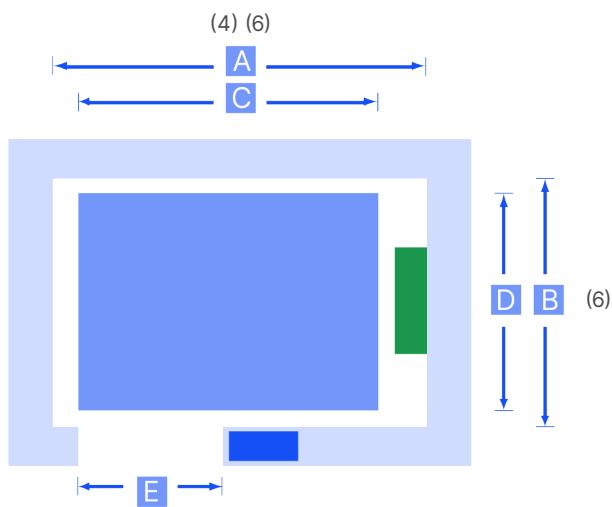


Integrated Control Solution (standard)

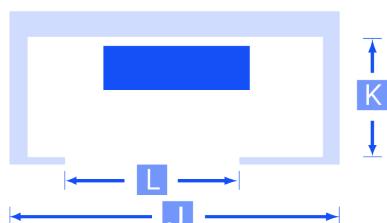

Remote Control Closet (option 1)


(2) (8)

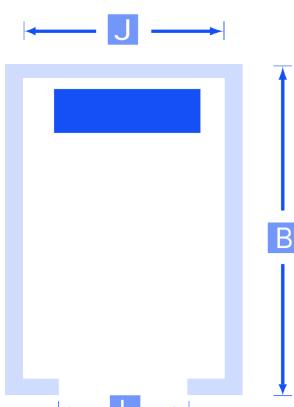

Adjacent or Remote Control Room (option 2)

(2) (8)

## Section view

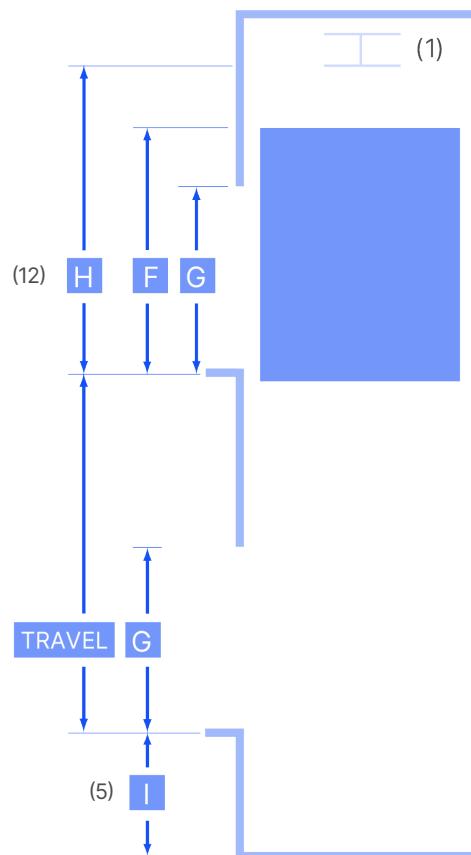

KONE

[www.kone.us](http://www.kone.us)

Copyright © 2026 KONE Inc. This publication is for general informational purposes only and we reserve the right at any time to alter the product design and specifications. No statement this publication contains shall be construed as a warranty or condition, express or implied, as to any product, its fitness for any particular purpose, merchantability, quality or representation of the terms of any purchase agreement. Minor differences between printed and actual colors may exist. KONE MonoSpace® DX, KONE EcoDisc®, KONE Care® and People Flow® are registered trademarks of KONE Corporation.

For configuration guidance or more information scan this code or visit our website to get in touch with a KONE Sales Professional:

[kone.us/contact](http://kone.us/contact)



SF3071 - TC - Rev 0126  
Printed in the U.S.